
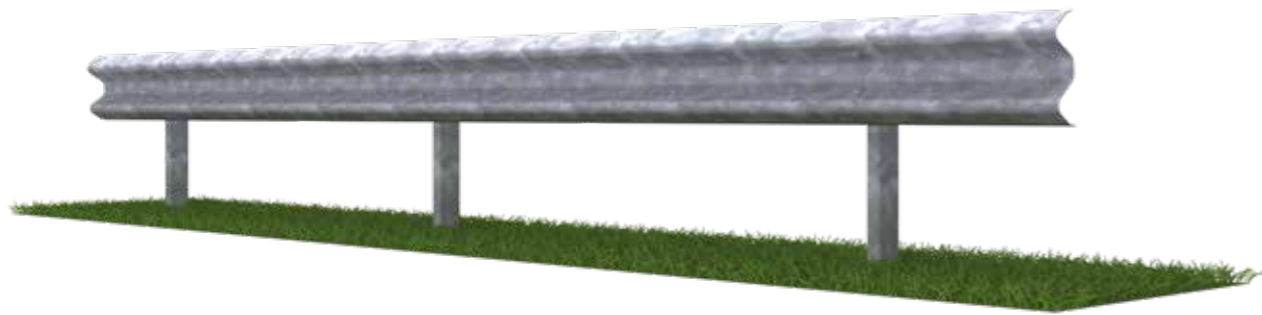


CLASSE N2 BORDO LATERALE - BARRIERA PAB T2 2 ONDE SINGOLA SU RILEVATO W3

Class N2 Roadside - PAB T2 2-waves single sided guardrail W3
 Gerammte Doppelwellen-Leitplanke PAB T2, Aufhaltestufe N2, Wirkungsbereich W3
 Classe N2 Bord latéral - Glissière PAB T2 2 ondes simple sur remblai W3
 Clase N2 Borde lateral - Barrera PAB T2 de doble onda simple sobre base terreno W3

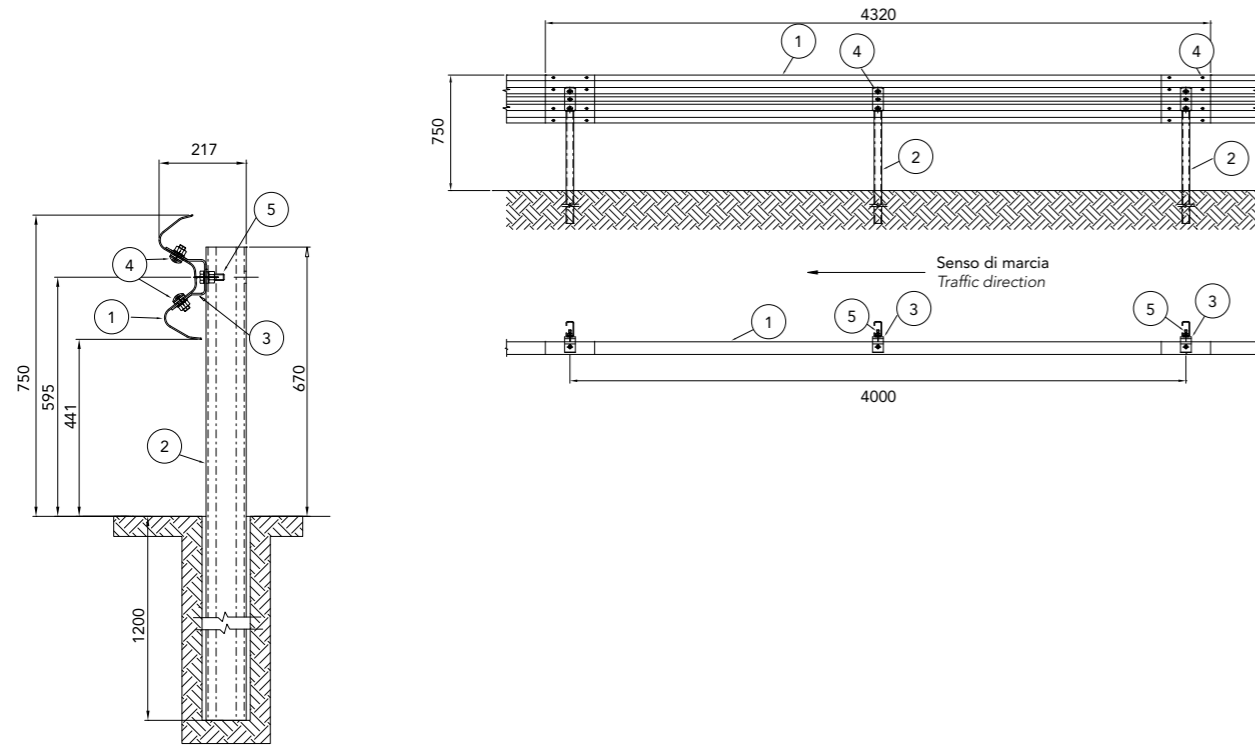


Caratteristiche Characteristics, Eigenschaften, Caractéristiques, Características	
Altezza fuori terra Height above ground level, Höhe über Grundboden, Hauteur hors sol, Altura sobre el suelo	750 mm
Profondità d'infissione Depth of penetration, Rammtiefe, Profondeur de piling du poteau, Longitud hincada	1200 mm
Ingombro trasversale Overall width, Gesamtbreite, Grosseur hors tout, Anchura total	217 mm
Interasse pali Post spacing, Steherabstand, Distance entre poteaux, Distancia entre postes	2000 mm

Rapporti di prova Crash test reports, Testberichte, Comptes rendus d'essais, Relaciones de pruebas											
Test n.	Facility	Test	Type	Barrier length MTL	Mass kg	Speed km/h	ASI max 1.4	THIV max 33 km/h	D m	Vi m	W m
PROVA 916	Aisico	TB32	Laterale 20°	64,00	1500	110	-	-	0,8	0,8=VI2	0,9=W3
PROVA 917	Aisico	TB11	Laterale 20°	64,00	900	100	1,0=A	28	0,6	-	0,7=W2

N2-W3

PAB T2 2-waves

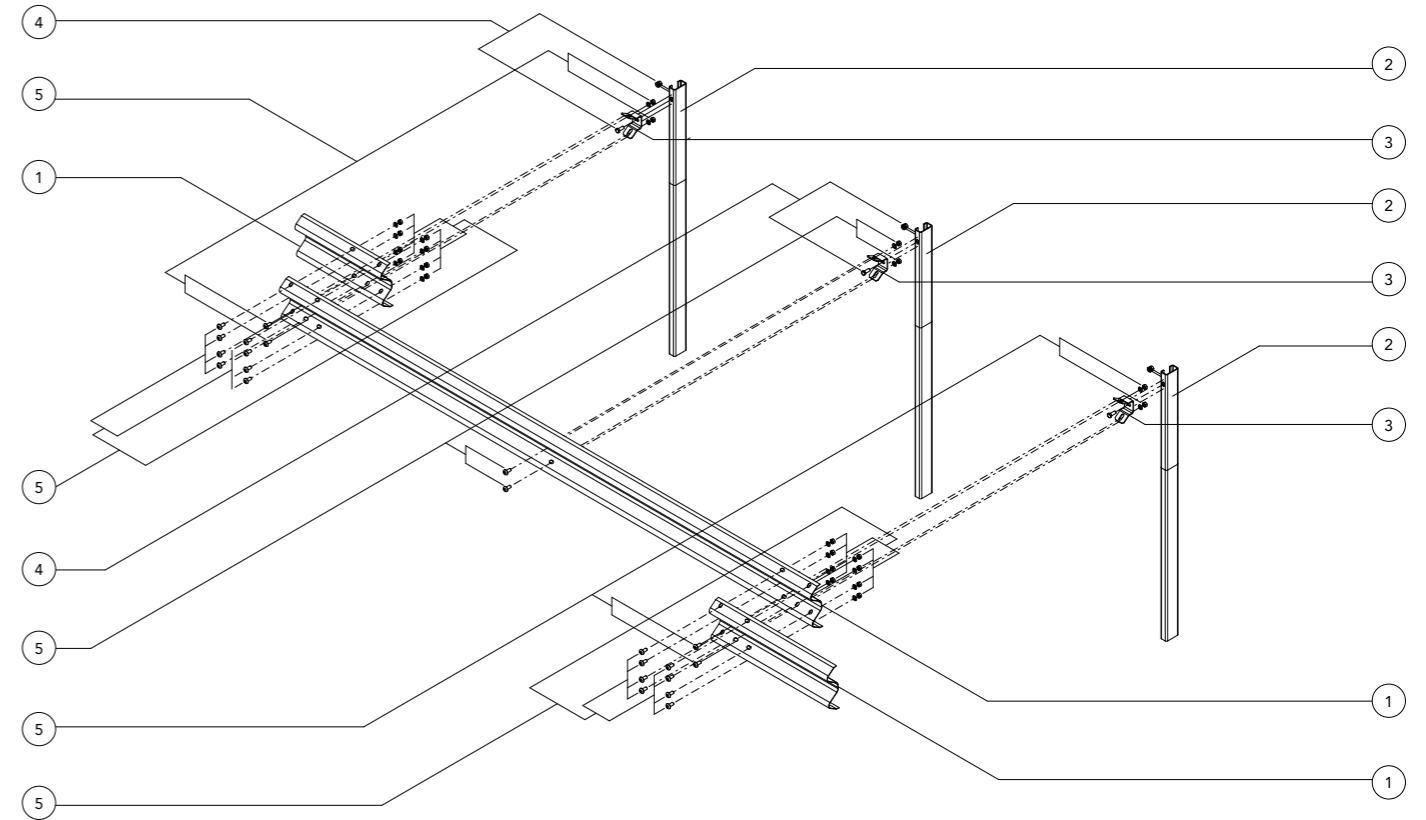

Componenti Components, Bauteile, Composants, Elementos			
Descrizione - barriera in acciaio zincato Description - galvanized steel barrier			Materiale Material
5	Bullone completo Bolt with nut and washer, Schraube komplett, Boulon complet, Tornillo completo con tuerca y arandela	M16x40 mm	Classe 8.8
4		M16x35 mm	Classe 8.8
3	Distanziatore Spacer, Abstandhalter, Entretoise, Separador	279x70 Th=5 mm	S 355MC
2	Palo "C" C-post, C-Steher, Poteau en C, Poste "C"	150x50x25 Th=5, H=1870 mm	S 355MC
1	Fascia 2 onde 2-waves beam, 2-wellige Leitschiene, Glissière 2 ondes, Banda doble onda	486x4320 Th=3 mm	S 420MC